


Unit 5

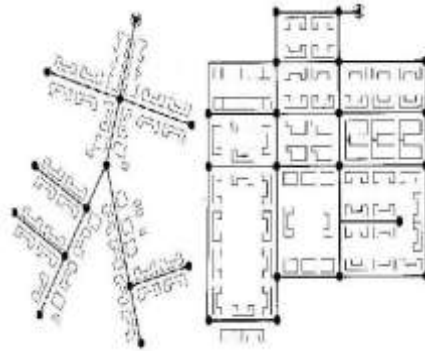

Water Distribution and Supply to Buildings

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

1

Introduction



- ❖ The purpose of distribution system is to deliver water to consumer with appropriate quality, quantity and pressure.
- ❖ Distribution system is used to describe collectively the facilities used to supply water from its source to the point of usage.

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

2

Requirements for water distribution

- ❖ Water quality should not get deteriorated in the distribution pipes.
- ❖ It should be capable of supplying water at all the intended places with sufficient pressure head.
- ❖ It should be capable of supplying the requisite amount of water during fire fighting.

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

3

- ❖ The layout should be such that no consumer would be without water supply, during the repair of any section of the system.
- ❖ All the distribution pipes should be preferably laid one metre away or above the sewer lines.
- ❖ It should be fairly water-tight as to keep losses due to leakage to the minimum.


29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

4

Components of distribution system

Check Valve



Drain Valve



Sluice Valve



Air Valve



29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

5

Layouts of Distribution Network

- ❖ The distribution pipes are generally laid below the road pavements, and as such their layouts generally follow the layouts of roads.
- ❖ There are, in general, four different types of pipe networks; any one of which either singly or in combinations, can be used for a particular place.

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

6

They are:

- ❖ Dead End System
- ❖ Radial System
- ❖ Grid Iron System
- ❖ Ring System

29-Aug-13


Ezhilkumar - Assistant Professor -
Department of Civil Engineering

7

Dead End System...

- ❖ It is suitable for old towns and cities having no definite pattern of roads.

Dead End or Tree System

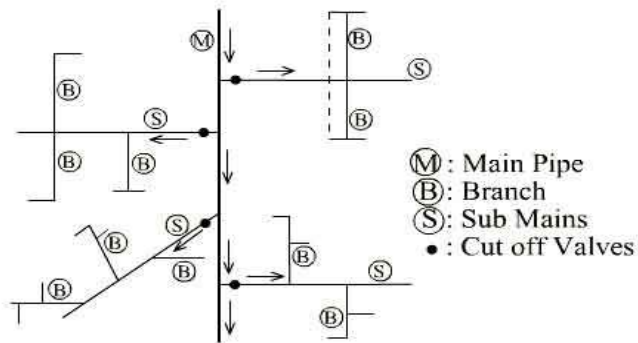

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

8

Advantages

- ❖ Relatively cheap.
- ❖ Determination of discharges and pressure easier due to less number of valves.

Disadvantages

- ❖ Due to many dead ends, stagnation of water occurs in pipes.

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

9


Radial System...

- ❖ The area is divided into different zones.
- ❖ The water is pumped into the distribution reservoir kept in the middle of each zone.
- ❖ The supply pipes are laid radially ending towards the periphery.

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

10

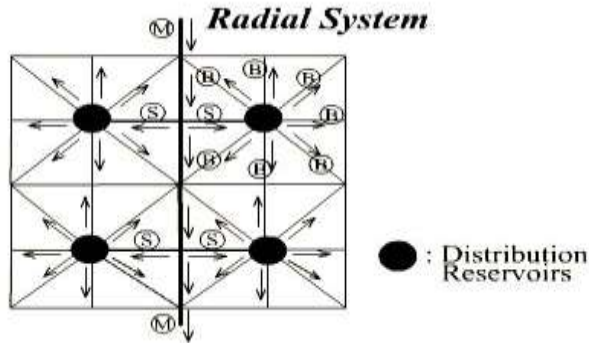

Advantages:

- ❖ It gives quick service.
- ❖ Calculation of pipe sizes is easy.


29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

11

Grid Iron System...

- ❖ It is suitable for cities with rectangular layout, where the water mains and branches are laid in rectangles.

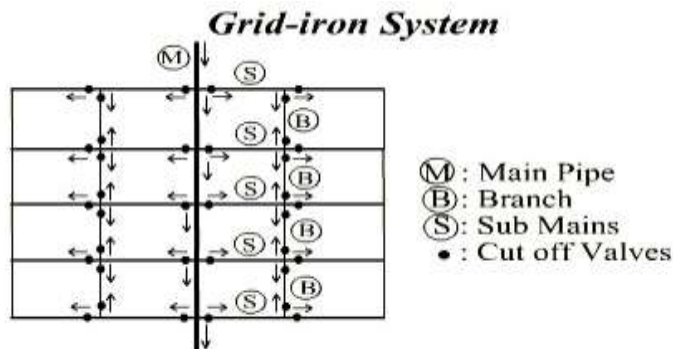

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

12

Advantages

- ❖ Water is kept in good circulation due to the absence of dead ends.
- ❖ In the cases of a breakdown in some section, water is available from some other direction.

Disadvantages

- ❖ Exact calculation of sizes of pipes is not possible due to provision of valves on all branches.

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

13

Ring System...

- ❖ The supply main is laid all along the peripheral roads and sub mains branch out from the mains.
- ❖ This system also follows the grid iron system with the flow pattern similar in character to that of dead end system.
- ❖ So, determination of the size of pipes is easy.


29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

14

Advantages

- ❖ Water can be supplied to any point from at least two directions.

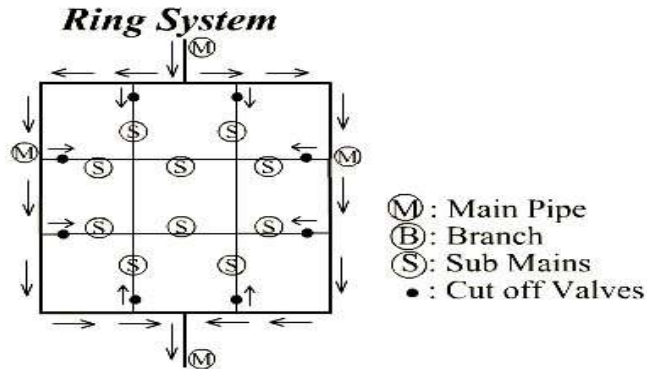

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

15

Methods of water distribution...

- ❖ For efficient distribution system adequate water pressure required at various points.
- ❖ Depending upon the level of source, topography of the area and other local conditions the water may be forced into distribution system by following ways -

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

16

1. Gravity system
2. Pumping system
3. Combined gravity and pumping system

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

17


Gravity system...

- ❖ Suitable when source of supply is at sufficient height.
- ❖ Most reliable and economical distribution system.
- ❖ The water head available at the consumer is just minimum required.
- ❖ The remaining head is consumed in the frictional and other losses.

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

18

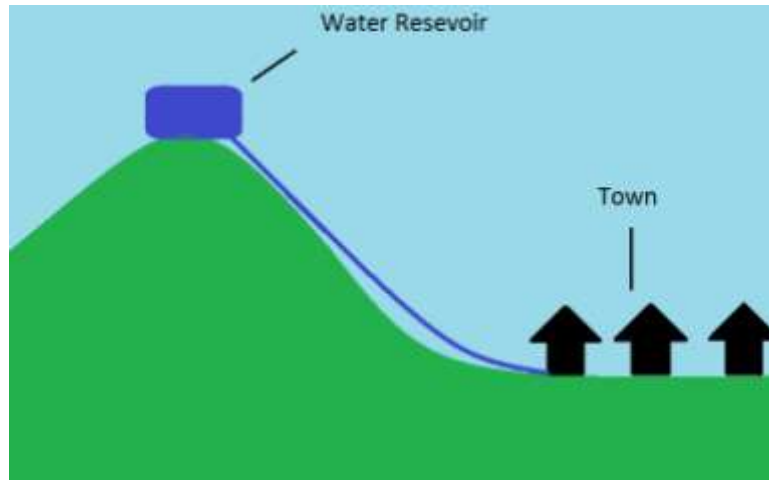

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

19


Pumping system...

- ❖ Treated water is directly pumped in to the distribution main with out storing.
- ❖ Also called pumping without storage system.
- ❖ High lifts pumps are required.
- ❖ If power supply fails, complete stoppage of water supply.
- ❖ This method is not generally used.

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

20

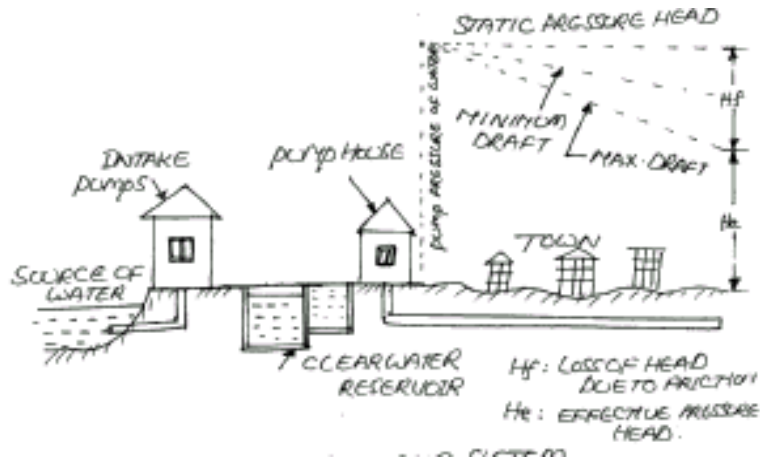

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

21


Combined gravity and pumping system

- ❖ Most common system.
- ❖ Treated water is pumped and stored in an elevated distribution reservoir.
- ❖ Then supplies to consumer by action of gravity.
- ❖ The excess water during low demand periods get stored in reservoir and get supplied during high demand period.
- ❖ Economical, efficient and reliable system.

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

22

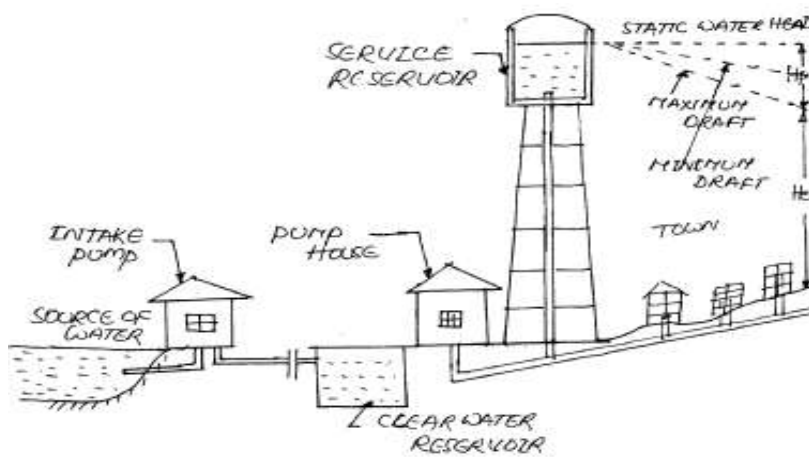

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

23

Distribution Reservoirs...

- ❖ Distribution reservoirs, also called **service reservoirs**, are the **storage reservoirs**, which store the treated water for supplying water during emergencies (such as during fires, repairs, etc.) and also to help in absorbing the hourly fluctuations in the normal water demand.

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

24

Functions of Distribution Reservoirs

- ❖ to absorb the hourly variations in demand.
- ❖ to maintain constant pressure in the distribution mains.
- ❖ water stored can be supplied during emergencies.


Location and Height of Distribution Reservoirs

- ❖ should be located as close as possible to the centre of demand.
- ❖ water level in the reservoir must be at a sufficient elevation to permit gravity flow at an adequate pressure.

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

25

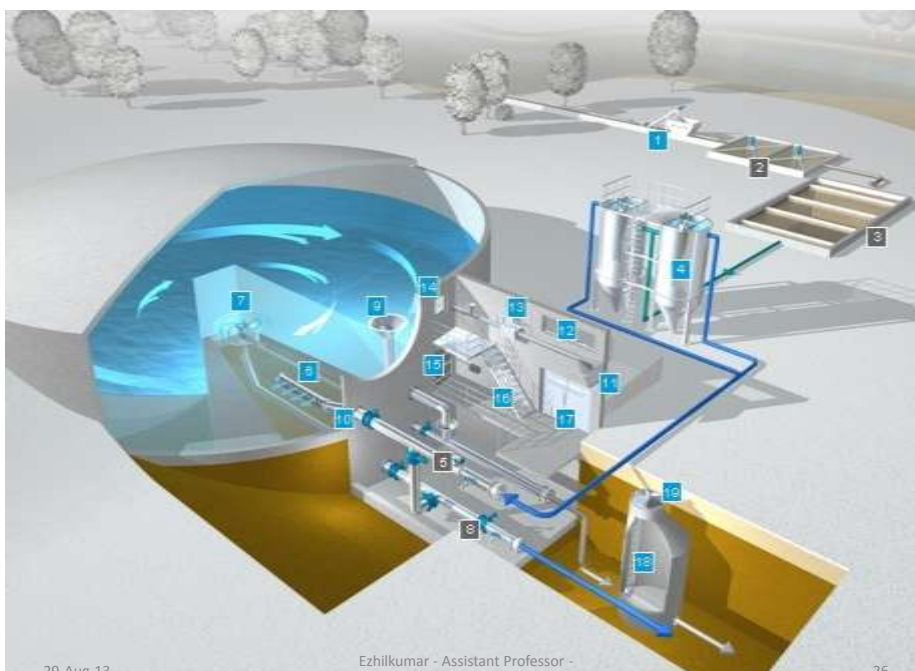

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

26

Types of Reservoirs...

❖ Depending upon their elevation w.r.t ground it may be classified into

1. Surface reservoirs
2. Elevated reservoirs

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

27

Surface reservoirs...

- ❖ These also called ground reservoir.
- ❖ Mostly circular or rectangular tank.
- ❖ Under ground reservoirs are preferred especially when the size is large.
- ❖ These reservoirs are constructed on high natural grounds and are usually made of stones, bricks, plain or reinforced cement concrete.

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

28

- ❖ The side walls are designed to take up the pressure of the water, when the reservoir is full and the earth pressure when it is empty.
- ❖ The position of ground water table is also considered while designing these reservoirs.
- ❖ The floors of these reservoirs may constructed with R.C.C slab or square stone blocks resting on columns.

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering


29

- ❖ To obtain water tightness bitumen compounds are used at all construction joints.
- ❖ At the top of roof about 60cm thick earth layer is deposited and maintained green lawns to protect the reservoir from cold and heat.
- ❖ For aeration of water and inspection, ventilation pipes and stairs are provided.

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

30

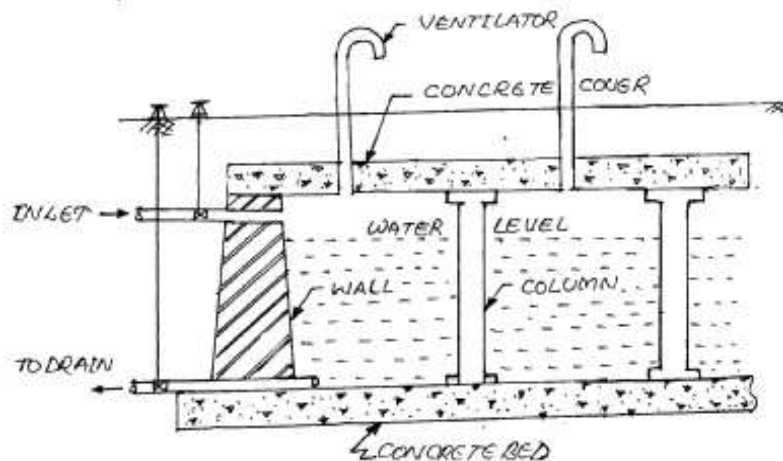

Under Ground Reservoir

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

31

TYPES OF TANKS

R.C.C TANKS: R.C.C tanks are very popular because

- 1) They have long life
- 2) Very little maintenance
- 3) decent appearance

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

32

G.I. TANKS: G.I. tanks are generally in rectangular or square in shape. Now a days G.I. tanks are not preferring because

- 1) Life of the tank is short
- 2) Corrosion of metal
- 3) maintenance cost may be more

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

33

HDPE TANKS: Now a days HDPE tanks are very popular for storing less quantity of water and hence useful for residential purpose. The following are the advantages of HDPE tanks

- 1) Handling is easy because of light weight
- 2) Cheap in cost
- 3) Maintenance cost is low
- 4) Cleaning of tanks are easy

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

34

ESR...

- ❖ Elevated Storage Reservoirs (ESRs) also referred to as **Overhead Tanks** are required at distribution areas which are not governed and controlled by the gravity system of distribution.
- ❖ These are rectangular, circular or elliptical in shape.
- ❖ If the topography of the town not suitable for under gravity, the elevated tank or reservoir are used.

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

35

- ❖ They are constructed where combine gravity and pumping system of water distribution is adopted.
- ❖ These tanks may be steel or RCC.
- ❖ Now RCC is commonly preferred.

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

36


The accessories of ESR are-

- ❖ Inlet and outlet pipe, overflow pipe discharging into a drain
- ❖ Float gauge, indicating depth of water.
- ❖ Automatic device to stop pumping when the tank is full.
- ❖ A manhole and ladder.
- ❖ Ventilator for circulation of fresh air.

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

37

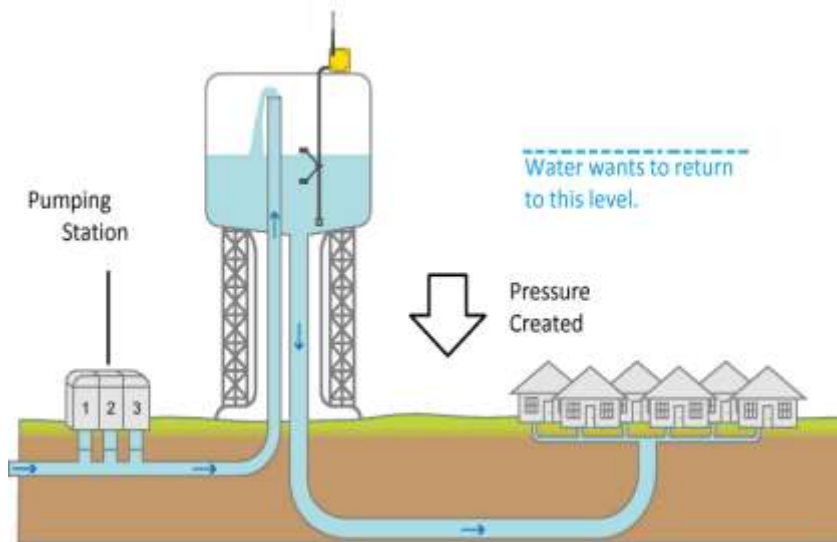

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

38

Storage Capacity of Distribution Reservoirs...

- ❖ The total storage capacity of a distribution reservoir is the summation of:
 - ❖ **Balancing Storage**: The quantity of water required to be stored in the reservoir for equalising or balancing fluctuating demand against constant supply is known as the balancing storage (or equalising or operating storage).

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

39

- ❖ **Breakdown Storage**: The breakdown storage or often called emergency storage is the storage preserved in order to tide over the emergencies posed by the failure of pumps, electricity, or any other mechanism driving the pumps.
- ❖ A value of about 25% of the total storage capacity of reservoirs, or 1.5 to 2 times of the average hourly supply, may be considered as enough provision for accounting this storage.

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

40

- ❖ ***Fire Storage:*** The third component of the total reservoir storage is the fire storage.
- ❖ This provision takes care of the requirements of water for extinguishing fires.
- ❖ A provision of 1 to 4 per person per day is sufficient to meet the requirement.

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

41

- ❖ When reserve storage is elevated, amount of fire reserve may be determined by
- ❖ $R = (F - P) T$
- ❖ R = Reserve storage (liters)
- ❖ F = Fire demand, liters/min
- ❖ P = Reserve fire pumping capacity, liters/min
- ❖ T = Duration of the fire in min

The total reservoir storage can finally be worked out by adding all the three storages.

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

42

Analysis of distribution network

In a pipe network, two conditions to be satisfied,

1. The algebraic sum of the pressure drops around a closed loop must be zero, i.e. there can be no discontinuity in pressure.
2. The flow entering a junction must be equal to the flow leaving the same junction, i.e. the law of continuity must be satisfied.

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

43

Analysis methods:

- 1) Hardy-Cross method
- 2) Equivalent pipe method
- 3) Electrical analyser method
- 4) Method of sections
- 5) Circle method
- 6) Pitometer distribution studies method

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

44

Appurtenances in the distribution system

- Fire hydrant
 - Post fire hydrant
 - Flush fire hydrant
- Water meters
 - Velocity meters or the Inferential meters
 - Positive meters or the Displacement meters

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

45

Fire hydrant



Requirements of a good hydrant

- ❖ Easily connectable to hose or motor pump
- ❖ Cheap
- ❖ Easily detectable during emergency
- ❖ Should not get fault when required to work
- ❖ Should provide undisturbed water flow

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

46

Water meters



Requirements of a good water meter

- ❖ Capable of measuring all kinds of flow
- ❖ Economically viable
- ❖ Error should not greater than 20%
- ❖ Should with stand all kind of pressure
- ❖ Head loss should be minimum
- ❖ Parts should not be damaged by the chemical present in water
- ❖ No back flow takes place and must be free from clogging

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

47

Detection of leakage

- **Direct observation**
- **Using sounding rods**
- **Plotting hydraulic gradient line**
- **Using waste detection meters**



29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

48

Direct observation



- Practical observation of wet spots on unpaved ground or luxurious growth of grass in a lawn or emergence of a spring at an odd place.
- These kind of occurrence are found when pipes are laid below loamy or clay soil.
- This observations are not suitable on sand soil.

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

49

Using Sounding rods



- Sharp pointed metal rod is thrust into ground and taken back.
- Presence of moist or muddy point will indicate the leakage.
- Escaping water sound is also heard using ***Aquaphone or Sonoscope*** instrument for magnified sound.


29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

50

Plotting hydraulic gradient line

- Pressure at different points in pipe line is measured and hydraulic line is graphed.
- Kink or change in slope of hydraulic gradient line indicates the leak.



29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

51

Using waste detection meters

- These meters will measure any unusually high flow passing through pipe mains during low consumption i.e during early morning or night.
- Test is conducted only at night.
- Individual supply lines are tested to detect leakage.



29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

52

House water connection

Fixtures



29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

53

Fittings



trap



tee



U-bend



90° elbow



Y-branch



45° elbow



offset

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

54



29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

55



29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

56

Water Piping Systems

- Piping system using **Direct Supply**
- Piping system using **Overhead Tank**
- Piping system using **Under-ground & Overhead Tank Supply**

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

57

Water Demand for Building

S. No	Building Type	Projected Population
1	Residence	5 person per dwelling unit area
2	Offices	1 person per 10 – 15 m ² of plinth area
3	Schools	Strength of the school plus teaching staff
4	Hostels	Number of beds + 4.5 x (warden's residence) + staff
5	Hotels	Number of beds + staff + requirement of restaurant seats
6	Hospitals	Number of beds + staff (residential requirement, if any, should also be added)

29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

58



29-Aug-13

Ezhilkumar - Assistant Professor -
Department of Civil Engineering

59